

Product Information



# PRESSURE WASH HOSES

**Stauff Anglia Limited**

405 Coppersmith Way | Wymondham | Norfolk NR18 0WY

**T: 01953 857158 F: 01953 857159 E: [Sales@stauffanglia.co.uk](mailto:Sales@stauffanglia.co.uk)**




**[www.stauffanglia.com](http://www.stauffanglia.com)**

## STAUFFJET 1SN BLACK



|                   |                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------|
| APPLICATION       | High pressure hose suitable for water jetting cleaning equipment, hot and cold water systems with detergent fluids. |
| CONSTRUCTION      | Wrapped cover as standard<br>High abrasion resistant covers also available                                          |
| REINFORCEMENT     | 1 High tensile steel braid                                                                                          |
| TEMPERATURE RANGE | -40°C to +150°C                                                                                                     |

000000100  
10SAP1010  
101010000  
100011111




|            | INCH | MM   | WIRE<br>OD MM | COVER<br>OD | BAR | PSI  | BAR  | MM  | KG/M |
|------------|------|------|---------------|-------------|-----|------|------|-----|------|
| 2020000159 | 1/4  | 6,4  | 11,1          | 13,4        | 250 | 3625 | 1000 | 100 | 0,21 |
| 2020000175 | 5/16 | 7,9  | 12,7          | 15,0        | 220 | 3190 | 880  | 115 | 0,24 |
| 2020000195 | 3/8  | 9,5  | 15,1          | 17,4        | 220 | 3190 | 880  | 125 | 0,33 |
| 2020065400 | 1/2  | 12,7 | 18,3          | 20,6        | 220 | 3190 | 880  | 180 | 0,41 |

For information on  
**HOSE COUPLING  
FERRULES**  
see separate  
Catalogue




## STAUFFJET 1SN BLUE

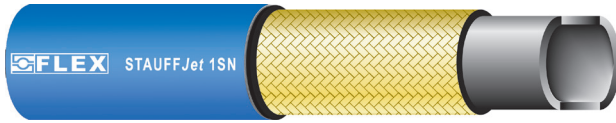

|                   |                                                                                                                                                                                                                             |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| APPLICATION       | High pressure hose. Suitable water jetting cleaning equipment hot and cold water systems with detergent fluids. Hose has a blue outer cover suitable for use in food factories and areas that require a none marking cover. |
| CONSTRUCTION      | Wrapped cover as standard<br>High abrasion resistant covers also available                                                                                                                                                  |
| REINFORCEMENT     | 1 High tensile steel braid                                                                                                                                                                                                  |
| TEMPERATURE RANGE | -40°C to +150°C                                                                                                                                                                                                             |




|                                                  |      |      |               |             |     |      |      |     |      |  |  |  |
|--------------------------------------------------|------|------|---------------|-------------|-----|------|------|-----|------|--|--|--|
| 000000100<br>10SAP1010<br>101010000<br>100011111 |      |      |               |             |     |      |      |     |      |  |  |  |
|                                                  | INCH | MM   | WIRE<br>OD MM | COVER<br>OD | BAR | PSI  | BAR  | MM  | KG/M |  |  |  |
| 2020065401                                       | 1/4  | 6,4  | 11,1          | 13,4        | 250 | 3625 | 1000 | 100 | 0,21 |  |  |  |
| 2020065402                                       | 5/16 | 7,9  | 12,7          | 15,0        | 220 | 3190 | 880  | 115 | 0,24 |  |  |  |
| 2020000198                                       | 3/8  | 9,5  | 15,1          | 17,4        | 220 | 3190 | 880  | 125 | 0,33 |  |  |  |
| 2020000237                                       | 1/2  | 12,7 | 18,3          | 20,6        | 220 | 3190 | 880  | 180 | 0,41 |  |  |  |

## STAUFFJET 2SN BLACK

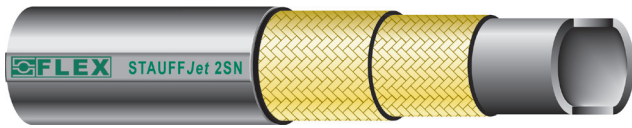

|                   |                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------|
| APPLICATION       | High pressure hose suitable for water jetting cleaning equipment, hot and cold water systems with detergent fluids. |
| CONSTRUCTION      | Wrapped cover as standard<br>High abrasion resistant covers also available                                          |
| REINFORCEMENT     | 2 High tensile steel braids                                                                                         |
| TEMPERATURE RANGE | -40°C to +150°C                                                                                                     |

000000100  
10SAP1010  
101010000  
100011111



|            | INCH | MM   | WIRE<br>OD MM | COVER<br>OD | BAR | PSI  | BAR  | MM  | KG/M |
|------------|------|------|---------------|-------------|-----|------|------|-----|------|
| 2020000165 | 1/4  | 6,4  | 12,7          | 15,0        | 400 | 5800 | 1600 | 100 | 0,33 |
| 2020000178 | 5/16 | 7,9  | 14,3          | 16,6        | 350 | 5075 | 1400 | 115 | 0,39 |
| 2020000217 | 3/8  | 9,5  | 16,7          | 19,0        | 330 | 4785 | 1320 | 125 | 0,50 |
| 2020000249 | 1/2  | 12,7 | 19,8          | 22,2        | 275 | 3987 | 860  | 180 | 0,59 |

## STAUFFJET 2SN BLUE



### APPLICATION

High pressure hose. Suitable water jetting cleaning equipment hot and cold water systems with detergent fluids. Hose has a blue outer cover suitable for use in food factories and areas that require a non-marking cover.

### CONSTRUCTION

Wrapped cover as standard  
High abrasion resistant covers also available




### REINFORCEMENT

2 High tensile steel braids

### TEMPERATURE RANGE

-40°C to +150°C

000000100  
10SAP1010  
101010000  
100011111




|            | INCH | MM   | WIRE<br>OD MM | COVER<br>OD | BAR | PSI  | BAR  | MM  | KG/M |
|------------|------|------|---------------|-------------|-----|------|------|-----|------|
| 2020048531 | 1/4  | 6,4  | 12,7          | 15,0        | 400 | 5800 | 1600 | 100 | 0,33 |
| 2020065403 | 5/16 | 7,9  | 14,3          | 16,6        | 350 | 5075 | 1400 | 115 | 0,39 |
| 2020000218 | 3/8  | 9,5  | 16,7          | 19,0        | 330 | 4785 | 1320 | 125 | 0,50 |
| 2020000250 | 1/2  | 12,7 | 19,8          | 22,2        | 275 | 3987 | 860  | 180 | 0,59 |

For information on  
**HOSE COUPLING  
FERRULES**  
see separate  
Catalogue






## STAUFFJET 1SC

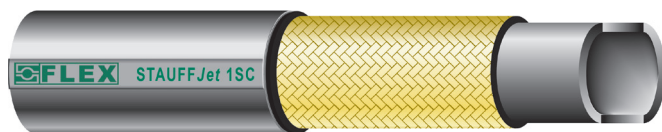

|                   |                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------|
| APPLICATION       | High pressure hose suitable for water jetting cleaning equipment, hot and cold water systems with detergent fluids. |
| CONSTRUCTION      | Wrapped cover as standard (black and blue)<br>High abrasion resistant covers also available                         |
| REINFORCEMENT     | 1 High tensile steel braid                                                                                          |
| TEMPERATURE RANGE | -40°C to +150°C                                                                                                     |

000000100  
10SAP1010  
101010000  
100011111




|            | INCH | MM   | WIRE<br>OD MM | COVER<br>OD | BAR | PSI  | BAR | MM  | KG/M |
|------------|------|------|---------------|-------------|-----|------|-----|-----|------|
| 2020065404 | 1/4  | 6,4  | 11,1          | 13,4        | 225 | 3625 | 900 | 75  | 0,18 |
| 2020065405 | 5/16 | 7,9  | 12,7          | 15,0        | 215 | 3117 | 860 | 85  | 0,21 |
| 2020065406 | 3/8  | 9,5  | 15,1          | 17,4        | 180 | 2610 | 720 | 90  | 0,28 |
| 2020065407 | 1/2  | 12,7 | 18,3          | 20,6        | 160 | 2320 | 640 | 130 | 0,33 |

For information on  
**HOSE COUPLING  
FERRULES**  
see separate  
Catalogue



## STAUFFJET Longlife

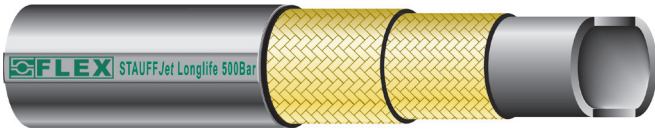

|                   |                                                                                                                                            |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| APPLICATION       | Extremely high pressure hose suitable for water jetting blasting and cleaning equipment, hot and cold water systems with detergent fluids. |
| CONSTRUCTION      | Wrapped cover as standard (black and blue)<br>High abrasion resistant covers also available                                                |
| REINFORCEMENT     | 2 High tensile steel braids                                                                                                                |
| TEMPERATURE RANGE | -40°C to +150°C                                                                                                                            |

| <div>000000100<br/>10SAP1010<br/>101010000<br/>100011111</div> |      |      |               |             |     |      |      |     |      |
|----------------------------------------------------------------|------|------|---------------|-------------|-----|------|------|-----|------|
|                                                                | INCH | MM   | WIRE<br>OD MM | COVER<br>OD | BAR | PSI  | BAR  | MM  | KG/M |
| 2020065408                                                     | 1/4  | 6,4  | 12,7          | 15,0        | 500 | 7250 | 2000 | 100 | 0,30 |
| 2020065409                                                     | 5/16 | 7,9  | 14,3          | 16,6        | 500 | 7250 | 2000 | 115 | 0,36 |
| 2020065410                                                     | 3/8  | 9,5  | 16,7          | 19,0        | 500 | 7250 | 2000 | 125 | 0,49 |
| 2020065411                                                     | 1/2  | 12,7 | 19,8          | 22,2        | 500 | 7250 | 2000 | 180 | 0,56 |